

Removal of lead from polluted Musi Water using Biosurfactants (Rhamnolipids)



K. Nagajyothi

Abstract: The largest city discharges about 600 million litres of waste water into the River Musi. Due to indiscriminate urbanisation and lack of planning, Musi has been the receptacle for the domestic and industrial waste water in the city. High levels of chemical, biomedical, biological, pharmaceutical and industrial contamination cause ground water pollution has endangered aquatic life(1). People depend on the vegetables and fruits grown on Musi river bed leading to diseases and even miscarriages. The polluted water contains high levels of lead which leads to damage of nervous system, hematopoietic system, renal system, cardiovascular system, reproductive system etc.(2)
Key word: Musi water, musu river etc.,

I. INTRODUCTION:

Although chemosynthetic surfactants could help ion desorption of heavy metals from polluted water, they cause serious impact on water environment and human health due to high toxicity and non-biodegradable. Bio surfactants have low toxicity and can be easily synthesised from renewable resources(3). Rhamnolipids are surfactants produced by microorganism from renewable energy resources are capable of removing heavy metals by complexation at optimum conditions

II. EXPERIMENT

Musi water samples and Palak samples were collected from Peerzadiguda Area. The samples were tested for the quantity of lead in the presence and absence of biosurfactants. The bio surfactants are prepared by culturing bacteria in agar media, NaCl(5g/lit) and Rice Bran Oil (10% v/v). Incubation was carried out at room temperature in a rotary shaking machine at 150 rpm for 4 days. The cultured pseudomonas aeruginosa was centrifuged and treated with hexane and chloroform followed by evaporation and drying. Fresh leafy palak leaves were collected from the farm grown on Muzi river bed at

Peerzadiguda. The leaves were crushed and oxidised in the presence of air and then fired. Inert graphite rod was used to test the concentration of lead in water and leaf samples. Atomic absorption spectrophotometer (AA-2759 Shimadzu) was used to find the metal concentration and FT-IR was used to study the absorption of metals by the bio surfactant.

Manuscript published on 30 September 2019.

* Correspondence Author (s)

Mrs.V.Sellam, Assistant Professor, Computer Science and Engineering Department SRM Institute of Science and Technology, Chennai, India.

Dr. K. Nagajyothi, Swami Vivekananda Institute of Technology, Secunderabad

© The Authors. Published by Blue Eyes Intelligence Engineering and Sciences Publication (BEIESP). This is an [open access](http://creativecommons.org/licenses/by-nc-nd/4.0/) article under the CC-BY-NC-ND license <http://creativecommons.org/licenses/by-nc-nd/4.0/>.

III. RESULTS AND DISCUSSIONS

The surfactant solutions of different concentrations were prepared and treated with the musu water and palak samples. The pH was maintained at 6 and contact time was ten minutes.



Concn of P. Aeruginosa (ppm)	Concn of Pb in Musi water(ppm)	Concn of Pb in Palak leaves (ppm)
0	0.324	0.141
2	0.302	0.122
4	0.263	0.103
6	0.221	0.092
8	0.172	0.080
10	0.098	0.041
12	0.094	0.037
14	0.091	0.033
16	0.092	0.034
18	0.090	0.029
20	0.090	0.028

The effect of contact time has been studied at surfactant concentration 10 ppm.

Contact time in Min	0	2	4	6	8	10	12	14	16	18	20
Concn of Pb in Musi Water(ppm)	0.3	0.3	0.2	0.2	0.1	0.1	0.1	0.1	0.1	0.1	0.1

The optimum concentration of the surfactant was found to be 10 ppm and effective contact time was 10 minutes.



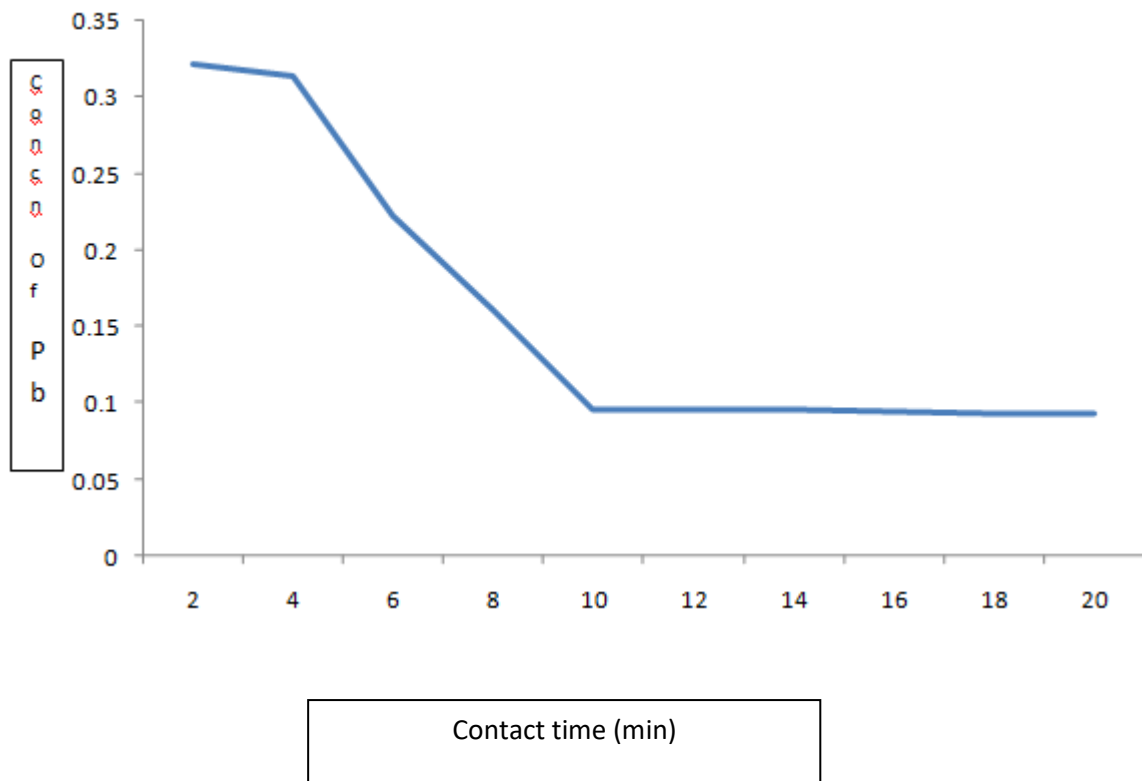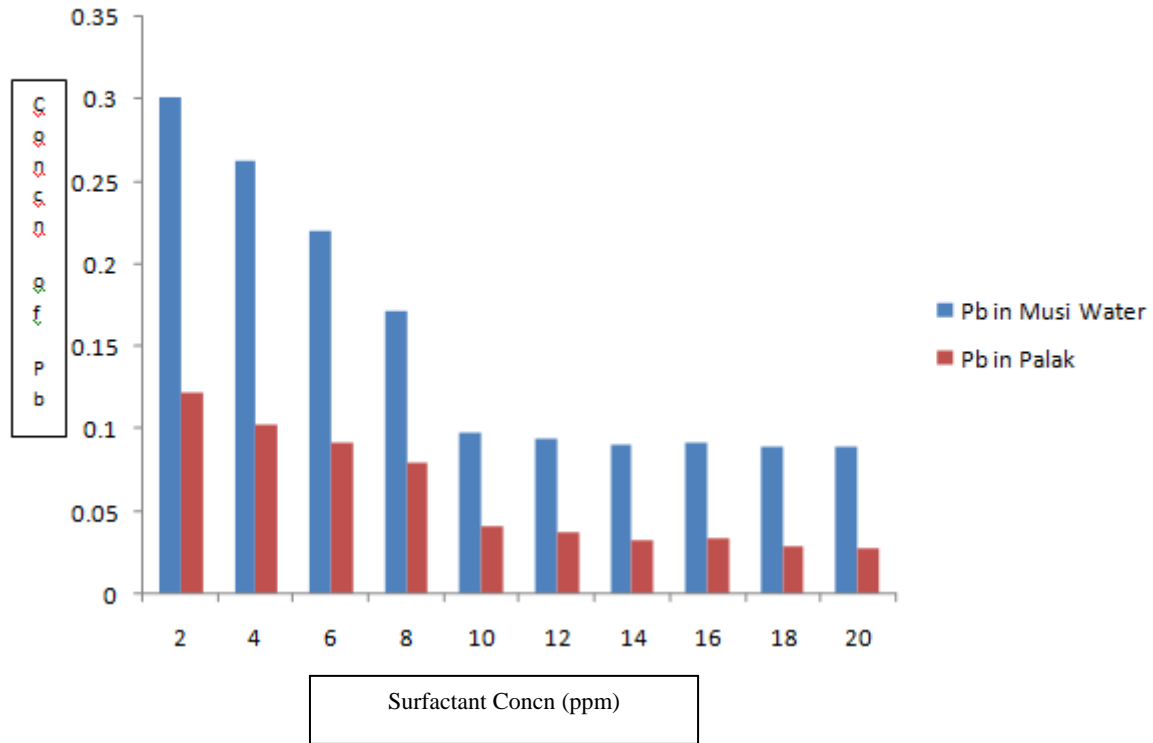

FT-IR spectra indicate a strong peak at 3417 cm⁻¹ and at 1643 cm⁻¹ indicate asymmetric stretching vibration of C=O. The C-H stretching vibration was indicated at 2854 cm⁻¹. The weak band between 1370 – 1470 cm⁻¹ indicate bending vibration of the –CH₃ and –CH₂ chains. 1110cm⁻¹ peak indicated the C-O stretching vibration. The presence of –OH

and COOH in the surfactant act as binding sites in removing toxic pollutants.

The absorption capacity was calculated using the formula

$$C_A = \frac{(C_f - C_i) \times v}{m}$$

Where CA is the Absorption Capacity of the surfactant, C_f is the final concentration of metal ions after treating with surfactant, C_i is the initial concentration of surfactant.

The average absorption coefficient was found to be 110 mg/lit.

IV. CONCLUSIONS

Lead was absorbed effectively from water and palak by the biosurfactant prepared by the fermentation of Rice bran oil through the formation of pseudomonas Aeriginous. The sorption capacity was found to be 110 mg/lit.

REFERENCES

1. Heavy metal in aquatic ecosystem emphasising its effect on tissue bioaccumulation and histopathology, Mahino Fathima, Journal of Environment Science and Technology, Vol.7, 1-15, 2014
2. Assi MA, Hezme MNM, Haron AW, Sabri MY, Rajion MA. The detrimental effects of lead on human and animal health. Veterinary World, Vol 9, 660-671, 2016
3. Absorption of heavy metals from leafy vegetables grown using Musi water, K. Nagajyothi, Journal of Environmental Science, Toxicology and Food Technology, Vol11, 30-31, 2017